




## **Gasket Eliminator - Intake manifold BBC**

“I hate gaskets”

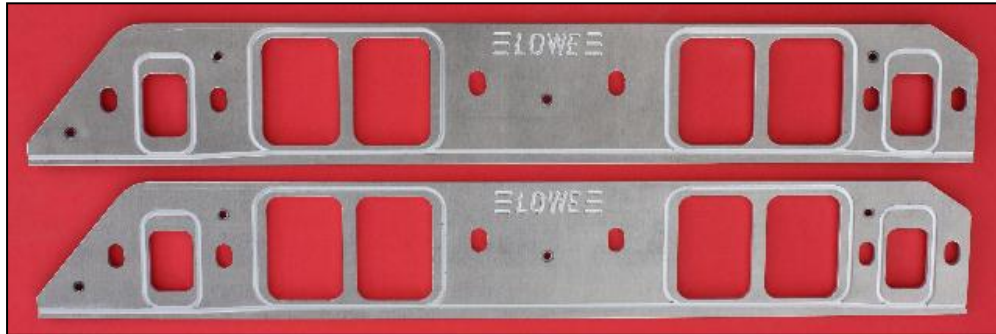

### **One Pair of 3mm thick gasket eliminators.**

**Includes 4 ea Intake Port O-Ring – 4ea of 103mm x 3mm**

**Includes 4ea Water Port O-Rings – 4ea 50mm x 3mm**

**Includes O-Ring material for sealing across the bottom – 1000mm of 1/8” cord.**

If you have ever scraped gaskets off during disassembly or rebuild you don't have to do much of this to learn to hate it. O-Ring surfaces are an option but putting the O-ring groove in the head or manifold is fraught with challenges. These Gasket Eliminators' can be installed and removed if necessary to do any necessary machining to the components without destroying the o-ring depth.

Some manifolds may have to be milled to install but many will bolt right on

Secure to manifold with countersunk screws through holes provided and seal to the manifold with silicone gasket sealer. Once the sealer is applied to the Gasket Eliminator and the screws installed install the manifold without the O-rings installed and bolt down until the sealer sets, preferably overnight. Remove, install the O-Rings and then it is ready for final installation.

Features

- \* O-Rings around all openings
- \* O-Ring across bottom
- \* Double O-Ring under water ports

### **3mm thick PN 39555-33213**

**List Price \$225.00+ a pair**

**RDD \$ 195.00+ a pair**

### **5mm thick PN 39555-33215**

**List Price \$225.00+ a pair**

**RDD \$ 195.00+ a pair**